


# 1427071-4 | CS30CM GRY C6 4/24 U/UTP RIB 305M

---

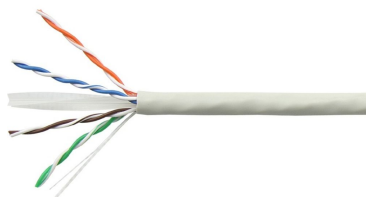

Copper Cable, category 6, 4 pair, UTP, CM rated, 24 AWG, 305 m reel in box, gray

## Product Classification

<b>Regional Availability</b>	Asia
<b>Portfolio</b>	NETCONNECT®
<b>Product Type</b>	Twisted pair cable

## General Specifications

<b>Product Number</b>	CS30CM
<b>ANSI/TIA Category</b>	6
<b>Cable Component Type</b>	Horizontal
<b>Cable Type</b>	U/UTP (unshielded)
<b>Conductor Type, singles</b>	Solid
<b>Conductors, quantity</b>	8
<b>Jacket Color</b>	Gray
<b>Pairs, quantity</b>	4
<b>Transmission Standards</b>	ANSI/TIA-568.2-D   CENELEC EN 50288-6-1   ISO/IEC 11801 Class E

## Dimensions

<b>Cable Length</b>	304.8 m   1000 ft
<b>Diameter Over Conductor</b>	0.978 mm   0.038 in
<b>Diameter Over Jacket, nominal</b>	5.588 mm   0.22 in
<b>Conductor Gauge, singles</b>	24 AWG

## Electrical Specifications

<b>Characteristic Impedance</b>	100 ohm
<b>dc Resistance Unbalance, maximum</b>	5 %

# 1427071-4 | CS30CM GRY C6 4/24 U/UTP RIB 305M

<b>dc Resistance, maximum</b>	9.38 ohms/100 m   2.859 ohms/100 ft
<b>Delay Skew, maximum</b>	45 ns
<b>Dielectric Strength, minimum</b>	1500 Vac   2500 Vdc
<b>Mutual Capacitance at Frequency</b>	5.6 nF/100 m @ 1 kHz
<b>Nominal Velocity of Propagation (NVP)</b>	67 %
<b>Operating Frequency, maximum</b>	250 MHz
<b>Operating Voltage, maximum</b>	80 V
<b>Propagation Delay, maximum</b>	536 ns/100m @250MHz
<b>Remote Powering</b>	Fully complies with the recommendations set forth by IEEE 802.3bt (Type 4) for the safe delivery of power over LAN cable when installed according to ISO/IEC 14763-2, CENELEC EN 50174-1, CENELEC EN 50174-2 or TIA TSB-184-A

## Material Specifications

<b>Conductor Material</b>	Bare copper
<b>Insulation Material</b>	Polyolefin
<b>Jacket Material</b>	PVC

## Mechanical Specifications

<b>Minimum Bend Radius Note</b>	4 times the outer cable diameter
---------------------------------	----------------------------------

## Environmental Specifications

<b>Installation temperature</b>	-0 °C to +60 °C (-32 °F to +140 °F)
<b>Operating Temperature</b>	-20 °C to +60 °C (-4 °F to +140 °F)
<b>Storage Temperature</b>	-20 °C to +80 °C (-4 °F to +176 °F)
<b>Environmental Space</b>	Non-plenum
<b>Flame Test Method</b>	CM

## Packaging and Weights

<b>Packaging Type</b>	Reel in box
-----------------------	-------------

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant

1427071-4 | CS30CM GRY C6 4/24 U/UTP RIB  
305M

---

